





KISKOVA LAISIN LS-OR-25



350degree adjustable
horizontaly



90degree adjustable
vertical



Parameters:

Body materials: ADC12 Die-cast Aluminum

Reflectors: diameter 75mm

Lens: diameter 75mm

Beam angle: 15°, 24°, 38°, 60°

Track adapter: 3 wire 1 phase | 2 wire 1 phase | 4 wire 3 phase | 6 wire 3 phase

Wattage: 15W - 30W

Body materials:

- 90x108mm, ADC12 die-cast aluminum,
- Finished color: powder-coated
- Matt white, matt black, silver/ grey



KISKOVALAISIN LS-OR-25

- LED Chip: Citizen
- High CRI: 80+, 90+, 97+
- LED Lumen: 120-180lm/W @CRI80
- Fixture lumen: 80-140lm/W @CRI80
- CCT:2700K, 3000K, 3500K, 4000K, 5000K
- On BBL or B.BBL




Adapter

Global adapter, 3 phase.
Powergear intrack adapter DIP 4 type
current AC200-240V: PF>0.95



Also available: TRIAC and DALI
5 years warranty

*Dimensions as shown below, are not
applicable with DALI and TRIAC versions.

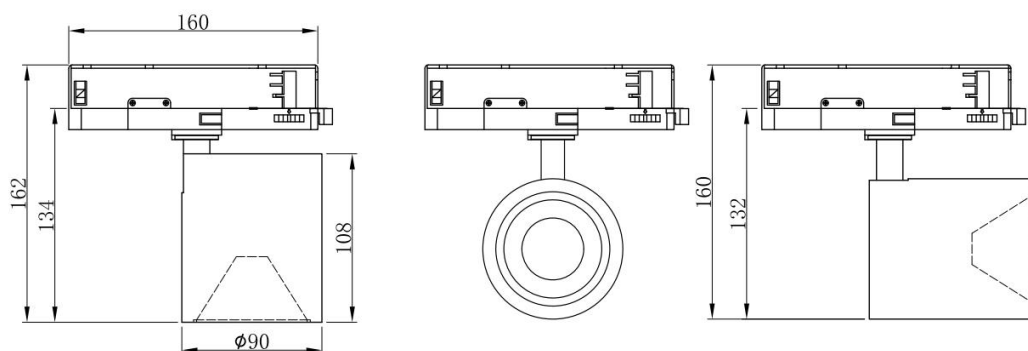

Full anti glare accessories




Snoot



Wall washer snoot



Barn doors



Honeycomb