
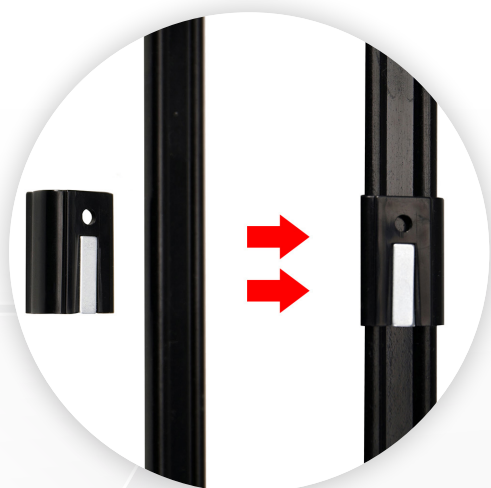


HYLLYVALAISTUS KETJUTETTAVA

ECOLINE SERIES

LUMI
SOLUTIONS

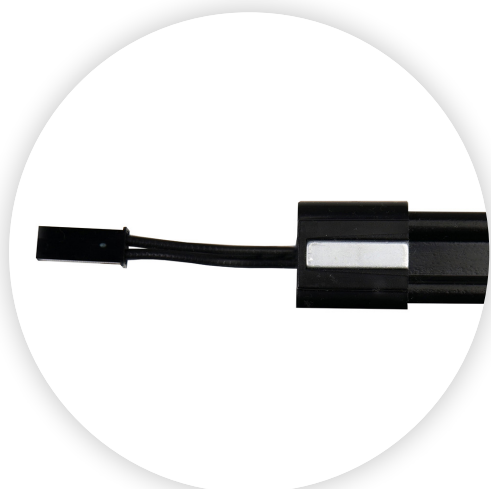

IP20

CE

ROHS

Patent

HYLLYVALAISTUS KETJUTETTAVA

LUMI
SOLUTIONS



ECOLINE SERIES


Product feature

- > Lower power high light output, can be connected in series.
- > New type of double PC extrusion technology which leads to be delicate, small flat, easy to hide.
- > Lower voltage DC24 constant current design, ensure consistency of light.
- > Well-designed multi-functional plastic mounting bracket, easy installation.
- > Multi-method installation, magnet or screw.

Technical data

Voltage	24VDC ($\pm 5\%$)
Ambient temperature	-10°C - +30°C
Light colours	2700-6500K
Colour rendering index	CRI > 90
Shell Material	Double color PC shell
Shiny surface	Transparent frosted PC cover
Lense technology	120°
LED type	SMD 2835
Ingress protection	IP20
Lifetime	>50,000h L80 B20 @ 10°C

Photometric distribution




HYLLYVALAISTUS KETJUTETTAVA

LUMI
SOLUTIONS



ECOLINE SERIES

Installation Size:(mm)

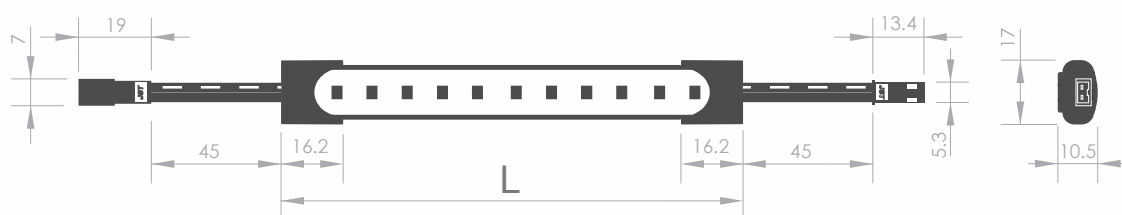

Description	Length(L)	CCT(K)	(lm/w) Luminaire efficacy	Power	CRI
SNK-HB-J-190	190.4 mm	2700-6500K	120 lm/w	0.8 w	CRI > 90
SNK-HB-J-345	345.4 mm	2700-6500K	120 lm/w	1.6 w	CRI > 90
SNK-HB-J-585	584.4 mm	2700-6500K	120 lm/w	2.4 W	CRI > 90
SNK-HB-J-712	712.4 mm	2700-6500K	120 lm/w	3.4 w	CRI > 90
SNK-HB-J-850	849.4 mm	2700-6500K	120 lm/w	4.0 w	CRI > 90
SNK-HB-J-950	949.4 mm	2700-6500K	120 lm/w	4.8 w	CRI > 90
SNK-HB-J-1000	999.4 mm	2700-6500K	120 lm/w	4.8 w	CRI > 90
SNK-HB-J-1100	1150 mm	2700-6500K	120 lm/w	4.8 w	CRI > 90

HYLLYVALAISTUS KETJUTETTAVA

LUMI
SOLUTIONS



ECOLINE SERIES

Technical data

You have two options for installation.

Note: The cumulative power of each lamp in series shall not exceed 36W.

Otherwise, please install power supply at both ends.

