


BoxSiDE-OVAL-L-W



1.5-4 m

double-sided
lightboxes




UK
CA
CE



- luminous efficacy 74 lm/W
- for indoor and outdoor use

- 16 pcs in chain

DIMENSIONS

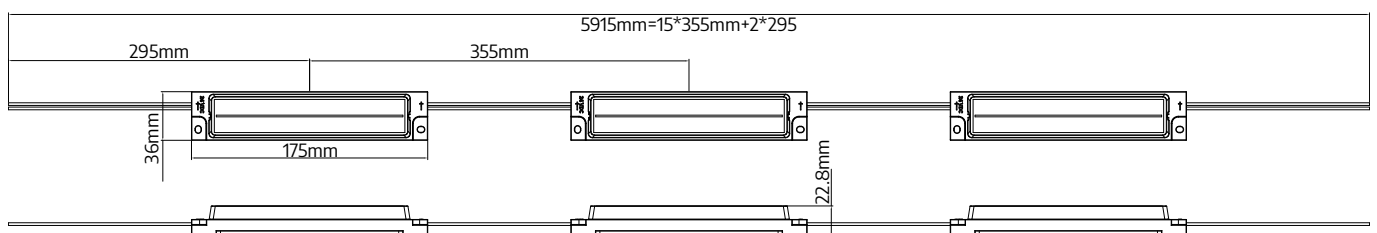

BoxSiDE-OVAL-M-W



TECHNICAL SPECIFICATION

Parameter	Value
Rated voltage	24 V DC
Power consumption per module	7,4 W
Chain power consumption	118,4 W
Current consumption per module	308 mA
LED diodes	Osram - 3014
Quantity of LEDs	1
Light color	W - white (6500K)
Flux	550 lm
Flux density	74 lm/W
Color rendering index CRI	≥80 (on request ≥90, ≥95)
Beam characteristic	11 x 77°
Current stabilization	No
Dimming	Yes
Module dimensions (L × W × H)	175 × 36 × 23 mm
Cable length	180 mm
Number of modules in 1 m	2,8
Box weight	15,3 kg
Montage	Adhesive tape / mounting screw
Lifetime	L70B50 > 70000h
Working temperature	-25°C ... +55°C
IP protection	IP67
Warranty	7 years

BoxSiDE-OVAL-M-W



CONNECTION DIAGRAM

One-side power input



Maximum number of modules 16 pcs



Two-side power input



Maximum number of modules 32 pcs

It is acceptable to connect multiple chains in parallel, as long as the power supply provides sufficient power.

ENERGY LABEL / BEAM ANGLE

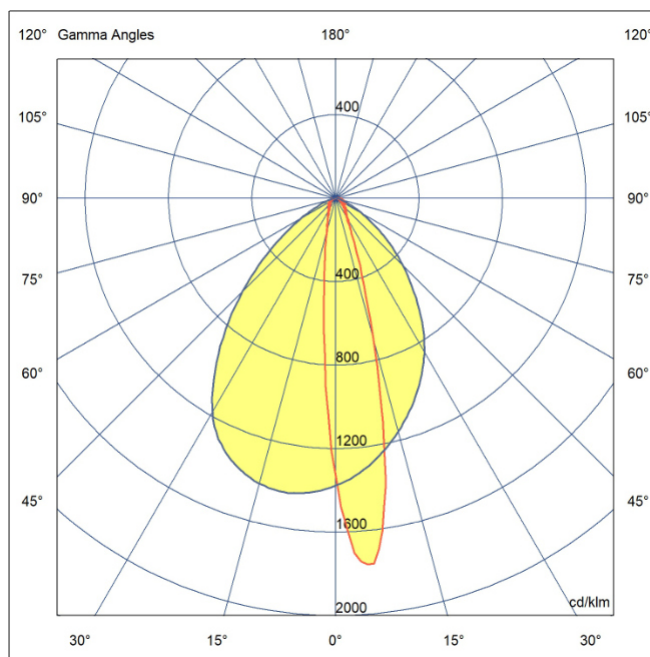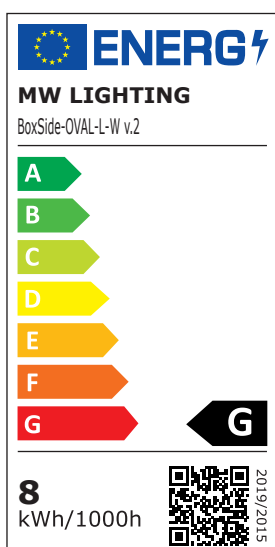

LIGHT COLOR / CCT


Abbreviation	Light color	CCT
WW	warm white	~3000K
NW	neutral white	~4000K
W	white	~6500K
CW	cold white	~10000K



BoxSiDE-OVAL-M-W




PACKING



Chain
16 pcs



Bag
16 pcs



Box
112 pcs

OTHER NOTES

The 3M tape placed on the device is only used to pre-attach and position the LED modules. Use your own glue or mounting screw to securely and permanently attach the item to the surface.