KOHDEVALAISTUS

KISKOVALAISIN

3-PHASE TRACK LIGHT

STIO

included

CRI	CRI>90
CCT	3000K PW
LOR	>85%
UGR	<20
SDCM	2
L+B values	L80B10 (34.000h)

System power	25,7W	30W
LED Lumen	3547lm	4015lm
System Lumen	3117lm	3528lm
LED Efficacy	153lm/w	150lm/w
System Efficiancy	121lm/w	117lm/w
Driver	700mA	800mA

PRODUCT LIST

Article No.	Product Name	Colour	Driver	LED Lumen	CCT	CRI	Reflector
2.17.4036	Railstraler Stio LED	White	700-800mA	3547lm - 4015lm	3000K PW	CRI>92	36°
2.17.4037	Railstraler Stio LED	Black	700-800mA	3547lm - 4015lm	3000K PW	CRI>92	36°

AVAILABLE BEAM ANGLES

Article No.	Description
5.14.0300	Reflector 15° for Stio LED
5.14.0301	Reflector 24° for Stio LED

LumiSolutions Oy
YHTEYSTIEDOT

Ajurintie 5, 03100 Nummela
www.lumisolutions.fi

info@lumisolutions.fi
+358 10 581 7860

KOHDEVALAISTUS

KISKOVALAISIN

3-PHASE TRACK LIGHT

STIO

Stio - Lightfile 3000K 36°

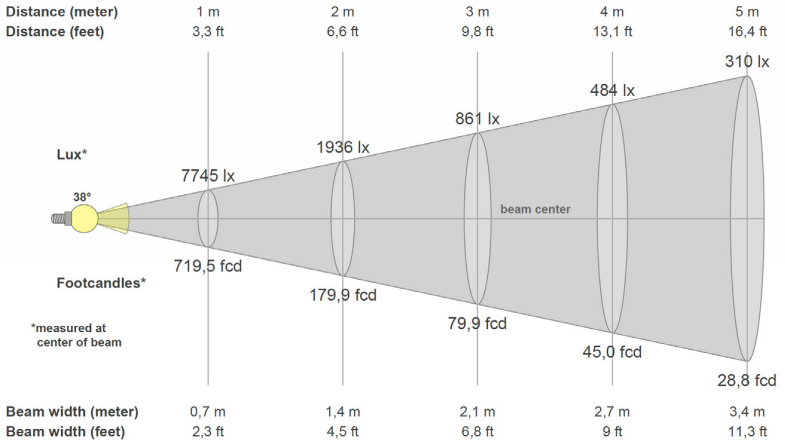

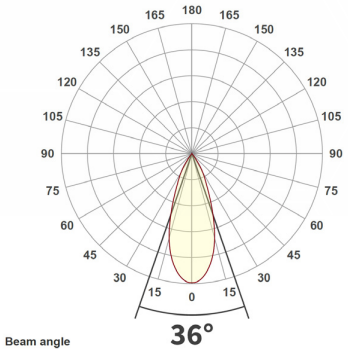

Technical drawing



LumiSolutions Oy
YHTEYSTIEDOT

Ajurintie 5, 03100 Nummela
www.lumisolutions.fi

info@lumisolutions.fi
+358 10 581 7860